# ACP-2000/ IPC-602

## **2U 6-Slot Rackmount Chassis with Front USB and PS/2 Interfaces**



#### **Features**

- 2U rackmount chassis supports up to 6 cards
- Butterfly backplane design
- Front-accessible USB and PS/2 connectors
- 250W / 300W AC ATX and DC power supply options
- Two 40 CFM cooling fans with air filter
- Lockable front door prevents unauthorized access

#### Features with ACP-2000 only:

- System alarm notification by front LED indicators
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

## C E FCC ROHS

### **Specifications**

		External	Internal
Drivo Roy	Slim Optical Disk Drive	1/-	-
Drive Bay	3.5"	2/1	-/1
	5.25"	-/1	-
Cooling	Fan	2 (8 cm / 47 CFM each) / 2 (8 cm / 40 CFM each)	
Cooling	Air Filter	Yes	
Front I/O Interface	USB	2	
FIUIL I/O IIILEIIAGE	PS/2	1	
Miscellaneous	LED Indicators	Power and HDD activity; fan and temperature for ACP-2000 only	
Miscellatieons	Rear Panel	One 9-pin D-Sub opening	
Intelligent System Module Remote	CPU/System fan speed , CPU/System temper	rature, motherboard voltage	
Monitoring	(Only selected Advantech MBs/CPU cards with SUSIAccess installed can fully enable these functions, check with Advantech local rep. for detailed information.) (This feature only enabled in ACP-2000)		
	(This location only chabled in Not 2000)	Operating	Non-Operating
	Temperature	0 ~ 40° C (32 ~ 104° F)	-20 ~ 60° C (-4 ~ 140° F)
Environment	Humidity	10 ~ 85% @ 40° C, non-condensing	10 ~ 95% @ 40° C, non-condensing
	Vibration (5 ~ 500 Hz)	0.5 Grms	2 G
	Shock	10 G (with 11 ms duration, half sine wave)	30 G
Dhysical Characteristics	Dimensions (W x H x D)	482 x 88 x 451 mm (19" x 3.5" x 17.8")	
Physical Characteristics	Weight	11.5 kg (25.3 lb) / 11.3 kg (24.9 lb)	

#### **Front View**


#### IPC-602




#### ACP-2000



#### **Inside View**



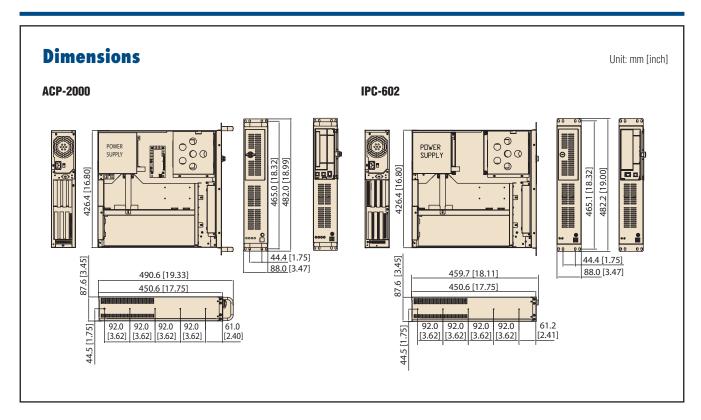

## **Ordering Information**

Part Number	Power Supply	Backplane
PICMG 1.0		
ACP-2000P3-00BE	Without power supply, with ATX switch	989K610622E (PCA-6106P3V)
ACP-2000P4-00BE	Without power supply, with ATX switch	989K610512E (PCA-6105P4V)
PICMG 1.3		
ACP-2000EBP-00BE	Without power supply, with ATX switch	-
IPC-602EBP-00XBE	Without power supply, with ATX switch	-

## **Power Supply Options**

Part Number	80 Plus Grade	Wattage	Туре	Input
PS8-250ATX-ZE (IPC-602 only)	Bronze	250W	Single	AC 100 ~ 240 V (full range)
PS8-300ATX-ZBE	Bronze	300W	Single	AC 100 ~ 240 V (full range)
PS8-400ATX-ZE	Bronze	400W	Single	AC 100 ~ 240 V (full range)
PS-300ATX-DC48E (ATX)	-	300W	Single	DC -48 V
RPS-300ATX-ZE (ATX, PFC) (ACP-2000 only)	-	300W	(1+1) Redundant	AC 100 ~ 240 V (full range)

## **Optional Accessories**

Part Number	Description
1950000868T00B	P3 card cage
1950000869N002	P4 card cage
96CB-SATAPOWER-6P1	SATA power wire 6-pin to big 4-pin (for slim ODD)
IDT-3120E	Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD trays

## **Spare Parts**

Part Number	Description
2130006189S000	Filter behind the door 156 x 45 x 5 mm
1990001949	Filter in the front of the fans 165 x 58 mm